



Teknik Katalog



Technical Catalogue



Catalogue Technique



Catálogo Técnico

Kem-P[®] **Vibration Motors**



INDUSTRIAL



EVM

 ISO 9001 : 2000

2 poles 3000/3600 rpm

Model Type Modele Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga				(*)Statik Moment Statical Moment Moment Statique Momento Estático		Ağırlık Weight Poids Peso		Giriş Gücü Input Power Puissance Potencia		Nominal Akım Nom. Current Courant Nominal Corriente Nominal	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM 50/3	01	3 0 0 0	3 6 0 0	48	52	0,471	0,510	4,8	3,6	4	3,8	100	110	0,23	0,20
EVM 65/3	01			66	76	0,647	0,746	6,57	5,26	4,55	4,35	150	165	0,30	0,28
EVM 130/3	01			152	167	1,226	1,638	12,4	9,3	4,75	4,6	180	190	0,35	0,32
EVM 200/3	01			212	229	2,080	2,246	18,6	12,4	5,1	4,75	180	190	0,35	0,32
EVM 300/3	02			310	297	3,041	2,914	30,8	20,5	8,5	8,1	270	300	0,58	0,60
EVM 400/3	02			418	401	4,101	3,934	41,5	27,6	11,4	10,9	360	400	0,75	0,80
EVM 500/3	03-a			541	520	5,307	5,101	53,7	43,6	19	18,5	470	550	0,80	0,92
EVM 650/3	03-a			668	687	6,553	6,739	66,4	47,4	21	20,4	500	600	0,98	0,85
EVM 760/3	03-a			768	788	7,534	7,730	76,4	57,4	23	22	550	650	1,00	0,90
EVM 800/3	04-a			797	813	7,819	7,976	77,2	61,5	31	30,2	570	680	1,10	1,10
EVM 850/3	04-a			859	825	8,427	8,093	85,4	56,9	32	31,4	600	700	1,20	1,10
EVM 950/3	04-a			938	982	9,202	9,633	94,9	66,4	33	32,2	650	750	1,30	1,35
EVM 1100/3	04-a			1050	1100	10,301	10,791	104,4	75,9	34	33,2	720	800	1,50	1,40
EVM 1300/3	04-b			1330	1354	13,047	13,283	140	100	39	37	1000	1100	2,20	2,00
EVM 1600/3	05-a			1610	1594	15,794	15,637	160	110	45	44	1500	1500	2,40	2,10
EVM 1800/3	05-a			1851	1833	18,158	17,982	184	126,5	46	45	1725	1725	2,67	2,41
EVM 2000/3	05-a			2041	2033	20,022	19,944	199	138	47	46	2000	2000	3,30	2,90
EVM 2300/3	05-a			2318	2299	22,740	22,553	221,7	155,2	49	47	2200	2250	3,50	3,40
EVM 2500/3	06-a			2500	2500	24,525	24,525	248	173	75	73	2300	2400	3,80	3,50
EVM 2850/3	06-a			2910	2850	28,547	27,959	285	198	87	84	2650	2780	4,37	4,00
EVM 3300/3	06-a			3500	3200	32,373	31,392	306	207	89	86	3200	3300	4,60	4,30
EVM 4000/3	06-b			4060	4920	39,829	48,265	405	267	123	117	4350	4400	6,80	5,95
EVM 5000/3	06-b			5000	6059	49,050	59,439	497	331	140	136	5000	5000	8,20	7,10
EVM 6500/3	09-a			6521	6200	63,971	60,822	626	414	203	193	8000	8000	13,30	12,00
EVM 7600/3	09-a			7600	7238	74,556	71,005	758	518	226	211	9000	8800	15,20	13,50
EVM 9000/3	09-a			9038	8957	88,663	87,868	890	615	238	235	10000	9500	17,00	13,50

(*) Working moment = 2x static moment

4 poles 1500/1800 rpm

Model Type Modele Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga				(*)Statik Moment Statistical Moment Moment Statique Momento Estático		Ağırlık Weight Poids Peso		Giriş Gücü Input Power Puissance Potencia		Nominal Akım Nom. Current Courant Nominal Corriente Nominal	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM 20/15	01	1 5 0 0	1 8 0 0	20	24	0,196	0,235	7,2	6	4,2	4	80	85	0,20	0,20
EVM 30/15	01			31	34	0,304	0,334	12,4	9,3	4,75	4,75	80	85	0,20	0,20
EVM 60/15	01			55	56	0,540	0,549	21,7	15,5	5,25	4,9	95	105	0,21	0,21
EVM 90/15	01			83	89	0,814	0,873	31	21,7	5,5	5,3	95	105	0,21	0,21
EVM 200/15	02			207	204	2,031	2,001	81,2	56,4	10,8	9,7	180	190	0,45	0,37
EVM 250/15	02			243	239	2,384	2,345	95,3	66,1	12	11	240	270	0,52	0,45
EVM 300/15	03-a			311	306	3,051	3,002	121,8	84	16,2	14,5	270	285	0,60	0,55
EVM 400/15	03-b			404	413	3,963	4,052	160	114	24,5	23,2	310	370	0,66	0,66
EVM 520/15	03-b			500	582	4,905	5,709	199	160,6	23	22	340	400	0,71	0,71
EVM 750/15	04-a			709	692	6,955	6,789	282	191	34,5	32,7	475	525	0,92	0,90
EVM 900/15	04-b			851	830	8,348	8,142	338,4	292,2	38,4	34,1	570	630	1,10	1,08
EVM 1100/15	04-b			1099	1021	10,781	10,016	473	282	40,7	35,5	600	680	1,16	1,14
EVM 1300/15	04-b			1318	1225	12,930	12,017	524	338	48,8	42,6	720	816	1,36	1,30
EVM 1500/15	05-b			1451	1601	14,234	15,706	577	442	51	48	950	1100	1,50	1,50
EVM 1800/15	05-b			1741	1921	17,079	18,845	692,4	530,4	54,6	52	1140	1185	1,80	1,80
EVM 2000/15	05-b			2076	2090	20,336	20,503	826	577	58	54	1200	1250	2,20	2,00
EVM 2300/15	05-c			2358	2342	23,132	22,975	903	609	67	59	1300	1400	2,30	2,10
EVM 2450/15	06-a			2551	2490	25,025	24,427	928	685	75,6	73	1450	1525	2,56	2,40
EVM 2700/15	06-b			2721	2720	26,693	26,683	1082	751	85	78	1700	1800	3,30	3,10
EVM 3100/15	06-b			3150	3148	30,902	30,882	1307	897	89	81	2000	2100	3,65	3,60
EVM 3800/15	07-b			3825	3792	37,523	37,200	1521	1047	115	109	2200	2450	4,60	4,70
EVM 4300/15	07-b			4400	4142	43,164	40,633	1752	1206	119	112	2900	3100	5,10	5,10
EVM 5000/15	08-a			5541	5213	54,357	51,140	1983	1372	155	138	3300	3300	5,40	4,90
EVM 6000/15	08-a			6200	6167	60,822	60,498	2307	1598	161	144	4350	4500	7,60	7,40
EVM 7000/15	09-a			6620	6585	64,942	64,599	2632	1818	215	206	6000	6000	10,50	9,50
EVM 7500/15	09-a			7400	7266	72,594	71,279	2941	2015	229	217	6500	6800	11,00	11,00
EVM 7900/15	09-b			8180	8037	80,246	78,843	3252	2219	242	234	7000	8000	11,50	11,50
EVM 9500/15	10-a			9560	8986	93,784	88,153	3583	2481	320	309	7500	8500	12,50	12,00
EVM 11500/15	10-b			11425	10982	112,079	107,733	4542	3832	385	370	11000	11000	19,00	16,00

(*) Working moment = 2x static moment

6 poles 1000/1200 rpm

Model Type Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga				(*)Statik Moment Statical Moment Moment Statique Momento Estático		Ağırlık Weight Poids Peso		Giriş Gücü Input Power Puissance Potencia		Nominal Akım Nom. Current Courant Nominal Corriente Nominal	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM 200/10	03-a	1 0 0 0	1 2 0 0	180	259	1,766	2,541	160,6	160,6	24,5	24,5	240	280	0,53	0,54
EVM 270/10	03-b			222	320	2,178	3,139	199	199	25,9	25,9	260	300	0,55	0,56
EVM 390/10	04-a			315	454	3,090	4,454	282	282	34,5	34,5	320	350	0,70	0,68
EVM 530/10	04-b			578	624	5,670	6,043	437	355	40,7	38,1	450	520	0,95	0,95
EVM 750/10	05-a			750	810	7,358	7,475	619	432	42,8	39,1	540	600	1,05	0,98
EVM 1000/10	05-b			980	1058	9,614	9,761	826	577	57	53	720	800	1,40	1,30
EVM 1200/10	05-c			1215	1197	11,919	11,743	1087	743	63	56,7	760	810	1,44	1,44
EVM 1300/10	05-c			1350	1330	13,244	13,047	1208	826	70	63	800	900	1,60	1,60
EVM 1550/10	05-c			1594	1577	15,637	15,470	1301	913	75	68	900	980	1,80	1,80
EVM 1700/10	06-b			1610	1690	15,794	16,579	1410	1041	89	82	1000	1200	2,00	2,00
EVM 2000/10	06-c			1820	1992	17,854	19,542	1629	1237	95	86	1200	1400	2,30	2,30
EVM 2300/10	06-c			2243	2345	22,004	23,004	2007	1629	108	97	1500	1800	2,40	2,30
EVM 3000/10	07-b			3000	3268	29,430	32,059	2594	2030	138	131	2000	2100	4,40	4,20
EVM 4500/10	08-b			4164	4555	40,849	44,685	3513	2681	188	177	2600	3000	5,00	5,00
EVM 5000/10	08-b			4570	5015	44,832	49,197	4088	3115	192	181	3000	3300	6,50	6,50
EVM 6000/10	08-b			5011	5472	49,158	53,680	5164	3601	204	193	4000	4650	8,20	8,20
EVM 6500/10	09-c			6000	5875	58,860	57,634	5702	3841	213	205	4500	4900	8,80	8,80
EVM 7000/10	09-c			6976	6482	68,435	64,569	6240	4088	274	250	5500	6000	9,50	9,50
EVM 8500/10	09-c			8850	8810	86,819	86,426	7650	5280	317	289	7500	8000	14,40	13,00
EVM 9000/10	10-b			9380	9780	96,432	95,942	7920	5530	380	355	8000	8500	14,60	13,20
EVM 10000/10	10-b			10210	9870	100,160	96,825	8651	5908	395	370	8500	8800	15,00	14,30
EVM 12000/10	10-c			12900	12414	126,549	121,781	10748	7650	414	386	9800	10800	17,00	16,70
EVM 13500/10	10-c			13431	–	131,758	–	12015	–	430	–	10000	–	17,20	–


(*) Working moment = 2x static moment

8 poles 750/900 rpm


Model Type Modele Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga (Kg) (KN)				(*)Statik Moment Statical Moment Moment Statique Momento Estático (Kgmm)		Ağırlık Weight Poids Peso (Kg)		Giriş Gücü Input Power Puissance Potencia (W)		Nominal Akım Nom. Current Courant Nominal Corriente Nominal (A)	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM 120/7,5	03-b	7 0 0	9 0 0	101	145	0,991	1,422	160,6	160,6	24,5	24,5	180	210	0,46	0,48
EVM 160/7,5	03-b			125	180	1,226	1,766	199	199	25,9	25,9	200	230	0,50	0,51
EVM 210/7,5	04-a			177	255	1,736	2,502	282	282	34,5	34,5	240	300	0,62	0,65
EVM 330/7,5	04-b			275	396	2,698	3,885	437	437	40,7	40,7	300	360	0,75	0,95
EVM 500/7,5	05-b			412	594	4,042	5,827	655	655	46	46	420	440	1,12	1,12
EVM 700/7,5	05-b			543	748	5,327	7,760	826	826	57	57	450	500	1,30	1,20
EVM 800/7,5	05-c			612	882	6,004	8,652	974	974	67,2	67,2	530	560	1,53	1,41
EVM 950/7,5	05-c			759	1093	7,446	10,722	1208	1208	70	70	550	600	1,60	1,40
EVM 1200/7,5	06-c			1025	1475	10,055	14,470	1629	1629	95	95	1100	1200	2,30	2,30
EVM 1500/7,5	06-c			1260	1815	12,361	17,805	2007	2007	108	108	1150	1250	2,40	2,40
EVM 2000/7,5	07-b			1631	2348	16,000	23,434	2594	2594	138	138	1600	1800	4,00	3,90
EVM 3200/7,5	08-b			2571	3700	25,222	36,297	4088	4088	192	192	2200	2400	5,50	5,30
EVM 4800/7,5	09-b			3925	5647	38,504	55,397	6240	6240	274	274	4500	5000	9,20	8,80
EVM 5800/7,5	09-c			4810	6927	47,186	67,954	7770	7770	317	317	5500	6500	10,70	10,50
EVM 5900/7,5	10-b			5545	7032	54,396	75,439	7770	7770	380	380	5800	6800	11,30	11,00
EVM 8300/7,5	10-c			6760	9727	66,316	95,422	10748	10748	414	414	7000	8000	13,60	13,00
EVM 9300/7,5	10-c			7557	10874	74,134	106,674	12015	12015	430	430	7500	8500	14,70	13,40

(*) Working moment = 2x static moment


Rif 1

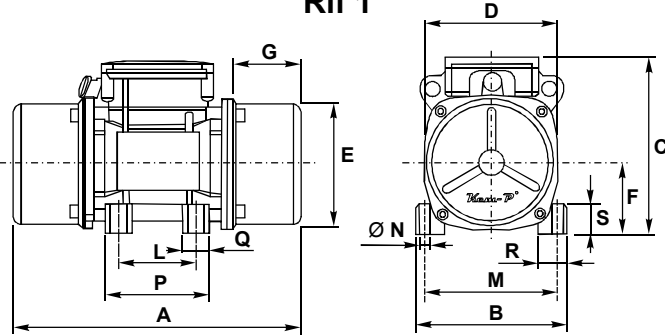

Rif 2

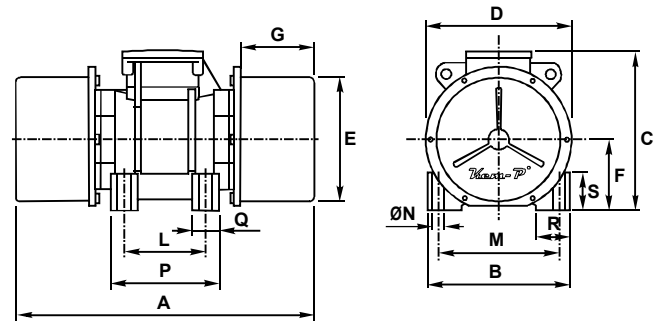


Rif 3

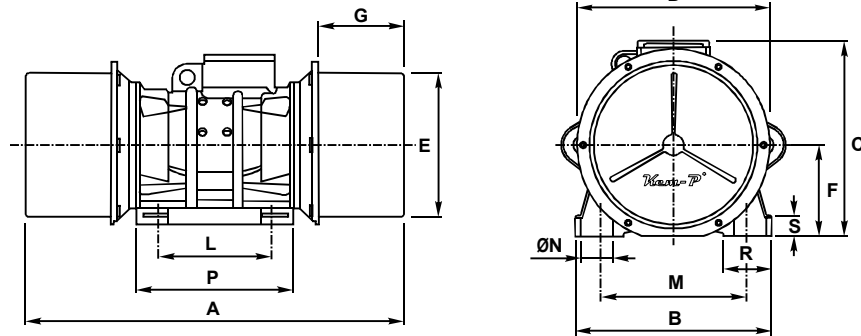


Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)

Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S
EVM 50/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 65/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 130/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 200/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 300/3	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30
EVM 400/3	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30
EVM 500/3	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47
EVM 650/3	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47
EVM 760/3	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47
EVM 800/3	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 850/3	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 950/3	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 1100/3	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 1300/3	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	50	55
EVM 1600/3	05-a	2	440	236	259	258	221	118	87	140÷150	190	4xM16	195	50	51	56
EVM 1800/3	05-a	2	440	236	259	258	221	118	87	140÷150	190	4xM16	195	50	51	56
EVM 2000/3	05-a	2	440	236	259	258	221	118	87	140÷150	190	4xM16	195	50	51	56
EVM 2300/3	05-a	2	440	236	259	258	221	118	87	140÷150	190	4xM16	195	50	51	56
EVM 2500/3	06-a	3	566	285	285	280	242	133	112	155	225	4xM20	263	**	70	30
EVM 2850/3	06-a	3	566	285	285	280	242	133	112	155	225	4xM20	263	**	70	30
EVM 3300/3	06-a	3	566	285	285	280	242	133	112	155	225	4xM20	263	**	70	30
EVM 4000/3	06-b	3	636	285	285	280	242	133	147	155	225	4xM20	263	**	70	30
EVM 5000/3	06-b	3	636	285	285	280	242	133	147	155	225	4xM20	263	**	70	30
EVM 6500/3	09-a	3	722	395	411	398	357	196	113	200	320	4xM27	358	**	93	40
EVM 7600/3	09-a	3	722	395	411	398	357	196	113	200	320	4xM27	358	**	93	40
EVM 9000/3	09-a	3	722	395	411	398	357	196	113	200	320	4xM27	358	**	93	40


Rif 1

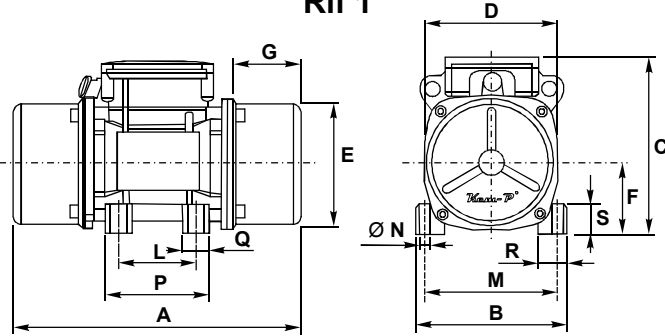



Rif 2

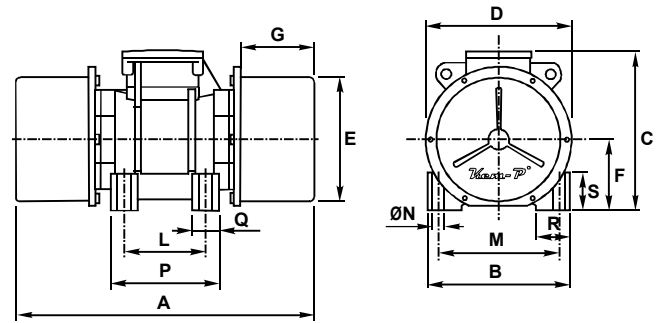

Rif 4

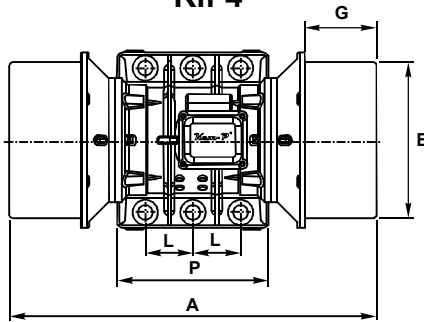

Rif 3

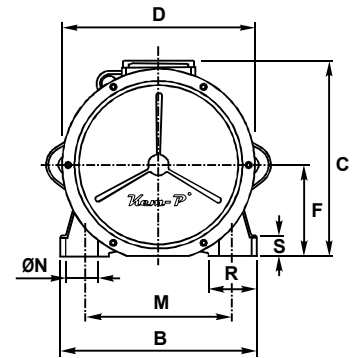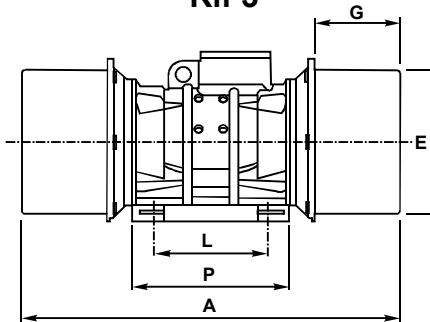


Rif 3-4


Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)

Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S
EVM 20/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 30/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 60/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 90/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23
EVM 200/15	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30
EVM 250/15	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30
EVM 300/15	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47
EVM 400/15	03-b	2	352	190	210	187	154	92	87	100÷105	140÷160	4xM12	133	33	40	47
EVM 520/15	03-b	2	352	190	210	187	154	92	87	100÷105	140÷160	4xM12	133	33	40	47
EVM 750/15	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 900/15	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	50	55
EVM 1100/15	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	50	55
EVM 1300/15	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	50	55
EVM 1500/15	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 1800/15	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 2000/15	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 2300/15	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 2450/15	06-a	3	566	285	285	280	242	133	112	155	225	4xM20	263	**	70	30
EVM 2700/15	06-b	3	636	285	285	280	242	133	147	155	225	4xM20	263	**	70	30
EVM 3100/15	06-b	3	636	285	285	280	242	133	147	155	225	4xM20	263	**	70	30
EVM 3800/15	07-b	3	675	320	320	330	284	160	155	155	255	4xM22	278	**	80	35
EVM 4300/15	07-b	3	675	320	320	330	284	160	155	155	255	4xM22	278	**	80	35
EVM 5000/15	08-a	3	644	340	350	353	310	172	102	180	280	4xM24	323	**	85	40
EVM 6000/15	08-a	3	644	340	350	353	310	172	102	180	280	4xM24	323	**	85	40
EVM 7000/15	09-a	3	722	395	411	398	357	196	113	200	320	4xM27	358	**	93	40
EVM 7500/15	09-a	3	722	395	411	398	357	196	113	200	320	4xM27	358	**	93	40
EVM 7900/15	09-b	3	842	395	411	398	357	196	173	200	320	4xM27	358	**	93	40
EVM 9500/15	10-a	4	812	460	435	460	412	220	114	125	380	6xM30	398	**	100	50
EVM 11500/15	10-b	4	922	460	435	460	412	220	169	125	380	6xM30	398	**	100	50


Rif 2

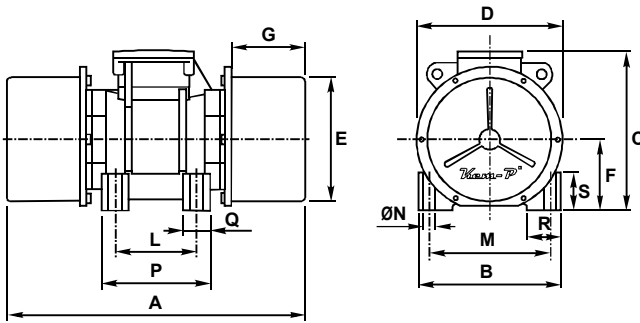


Rif 3-4

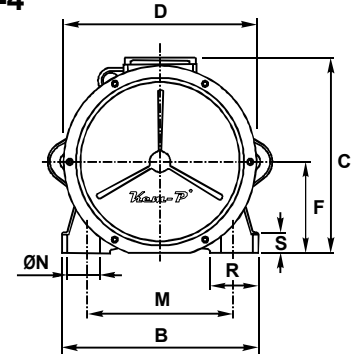

Rif 4

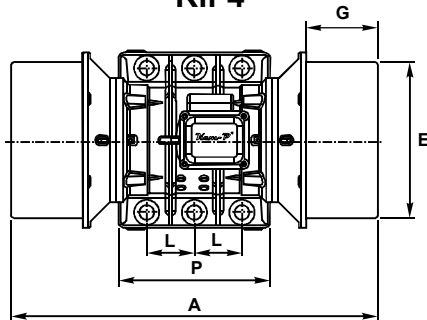


Rif 3

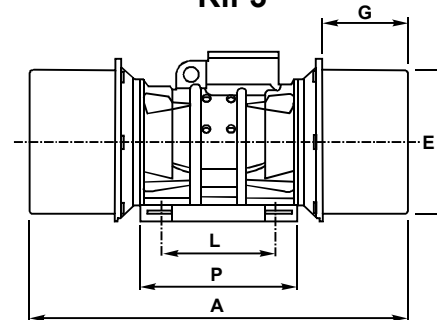


Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)

Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S
EVM 200/10	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47
EVM 270/10	03-b	2	352	190	210	187	154	92	87	100÷105	140÷160	4xM12	133	33	40	47
EVM 390/10	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	49,5	55
EVM 530/10	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	49,5	55
EVM 750/10	05-a	2	440	236	259	258	221	118	87	140÷150	190	4xM16	195	50	51	56
EVM 1000/10	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 1200/10	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 1300/10	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 1550/10	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 1700/10	06-b	3	636	285	285	280	242	133	147	155	225	4xM20	263	**	70	30
EVM 2000/10	06-c	3	706	285	285	280	242	133	182	155	225	4xM20	263	**	70	30
EVM 2300/10	06-c	3	706	285	285	280	242	133	182	155	225	4xM20	263	**	70	30
EVM 3000/10	07-b	3	675	320	320	330	284	160	155	155	255	4xM22	278	**	80	35
EVM 4500/10	08-b	3	774	340	350	353	310	172	167	180	280	4xM24	323	**	85	40
EVM 5000/10	08-b	3	774	340	350	353	310	172	167	180	280	4xM24	323	**	85	40
EVM 6000/10	08-b	3	774	340	350	353	310	172	167	180	280	4xM24	323	**	85	40
EVM 6500/10	09-c	3	892	395	411	398	357	196	198	200	320	4xM27	358	**	93	40
EVM 7000/10	09-c	3	892	395	411	398	357	196	198	200	320	4xM27	358	**	93	40
EVM 8500/10	09-c	3	892	395	411	398	357	196	198	200	320	4xM27	358	**	93	40
EVM 9000/10	10-b	4	922	460	435	460	412	220	169	125	380	6xM30	398	**	100	50
EVM 10000/10	10-b	4	922	460	435	460	412	220	169	125	380	6xM30	398	**	100	50
EVM 12000/10	10-c	4	972	460	435	460	412	220	194	125	380	6xM30	398	**	100	50
EVM 13500/10	10-c	4	972	460	435	460	412	220	194	125	380	6xM30	398	**	100	50


Rif 2

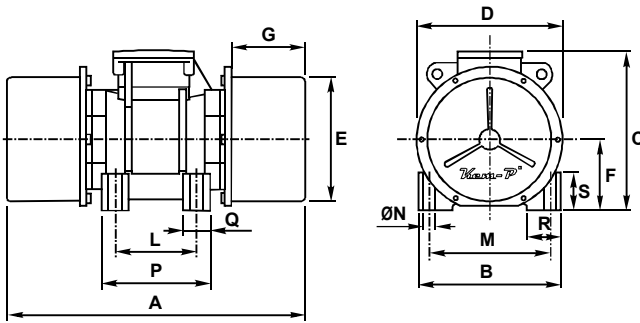


Rif 3-4

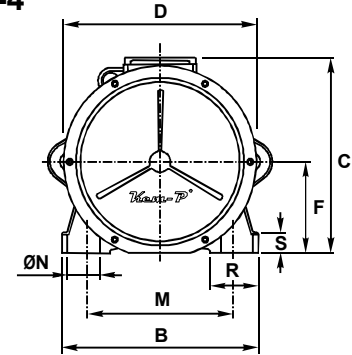

Rif 4

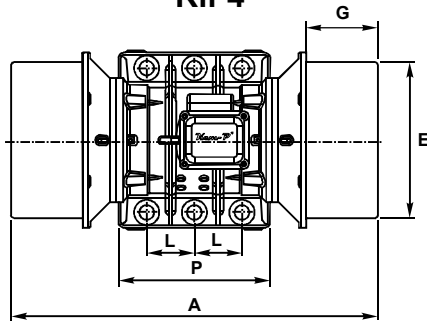

Rif 3

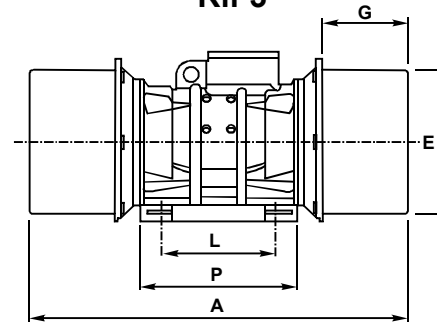

Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)

Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S
EVM 120/7,5	03-b	2	352	190	210	187	154	92	87	100÷105	140÷160	4xM12	133	33	40	47
EVM 160/7,5	03-b	2	352	190	210	187	154	92	87	100÷105	140÷160	4xM12	133	33	40	47
EVM 210/7,5	04-a	2	378	210	238	215	183	105	79	120	170	4xM16	160	40	50	55
EVM 330/7,5	04-b	2	444	210	238	215	183	105	112	120	170	4xM16	160	40	50	55
EVM 500/7,5	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 700/7,5	05-b	2	480	236	259	258	221	118	107	140÷150	190	4xM16	195	50	51	56
EVM 800/7,5	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 950/7,5	05-c	2	536	236	259	258	221	118	135	140÷150	190	4xM16	195	50	51	56
EVM 1200/7,5	06-c	3	706	285	285	280	242	133	182	155	225	4xM20	263	**	70	30
EVM 1500/7,5	06-c	3	706	285	285	280	242	133	182	155	225	4xM20	263	**	70	30
EVM 2000/7,5	07-b	3	675	320	320	330	284	160	155	155	255	4xM22	278	**	80	35
EVM 3200/7,5	08-b	3	774	340	350	353	310	172	167	180	280	4xM24	323	**	85	40
EVM 4800/7,5	09-b	3	842	395	411	398	357	196	173	200	320	4xM27	358	**	93	40
EVM 5800/7,5	09-c	3	892	395	411	398	357	196	198	200	320	4xM27	358	**	93	40
EVM 5900/7,5	10-b	4	922	460	435	460	412	220	169	125	380	6xM30	398	**	100	50
EVM 8300/7,5	10-c	4	972	460	435	460	412	220	194	125	380	6xM30	398	**	100	50
EVM 9300/7,5	10-c	4	972	460	435	460	412	220	194	125	380	6xM30	398	**	100	50

Not - Note

